

# 1912DC | Scissor Lift

## Working height

19.0m

Closed length	4.72m
Closed height	3.57m
Stowed height (guardrails lowered)	2.74m
Closed width	1.25m
Platform size	4.30m x 1.19m
Platform length (deck extended)	6.10m
Max SWL	750kg
Weight	11750kg


## Alternative machines

HL190E

## Manufacturer

Dingli

## Working envelope

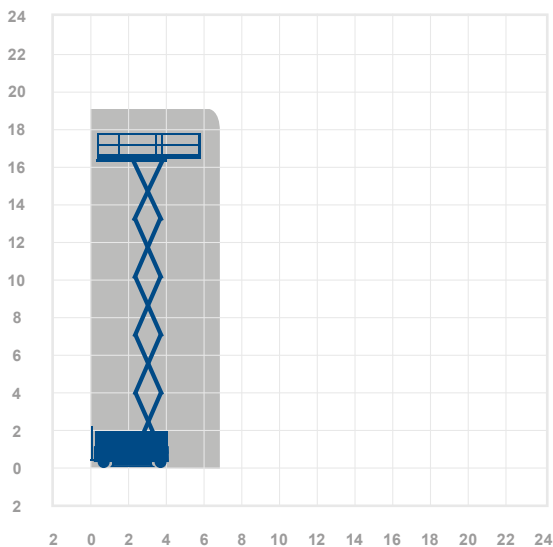

19.0m

## Standard features



## Optional extras



0345 745 0000

[nationwideplatforms.co.uk](http://nationwideplatforms.co.uk)

 **Nationwide  
Platforms**  
A **LOXAM** Company

# Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

## Height and outreach

Working height Horizontal outreach

AMWP11.5-8100
Boom Lift

Working height	11.2m	Alternative machines	
Horizontal outreach	3m	Star10	Star10A
Closed length	2.55m	Manufacturer	Orgh
Closed height	1.9m		
Closed width	1m		
Rotation	345°		
Platform height	0.2m		
Max SWL	200kg		
Weight	3000kg		
Deck size	0.62m x 0.875m		

**Working envelope**

11.2m
3m

**Standard features**

- 
- 
- 
- 
- 
- 
- 
-

**Optional extras**

- 
- 
- 
-

**0345 745 0000**  
nationwideplatforms.co.uk
Nationwide Platforms  
A LEMAR Company

## Standard features

- |                               |                   |                          |                           |
|-------------------------------|-------------------|--------------------------|---------------------------|
| Battery power                 | IPAF licence type | Straight telescopic boom | Self drive                |
| Diesel power                  | IPAF licence type | Non-marking tyres        | J1B rotation              |
| Lithium battery               | IPAF licence type | Outtrigger legs          | IPAF driving licence type |
| Hybrid power                  | IPAF licence type | Maximum people in cage*  | Power to platform         |
| Dual fuel option              | IPAF licence type | Push around vehicles     | Generator                 |
| Gas power option              | Tracked           | Operator powered         |                           |
| Rough terrain (2 wheel drive) | Mast boom         | Indoor use only          |                           |
| Rough terrain (4 wheel drive) | Articulating boom | Indoor/Outdoor           |                           |

## Optional extras

- |               |              |                               |                      |
|---------------|--------------|-------------------------------|----------------------|
| SkySiren®     | SkyRakPlus®  | SkyRakEdge™                   | Generator            |
| SkySiren® PCS | SkyRakBoom®  | SkyShield™                    | Camera pod           |
| SkySentry®    | SkyRakMulti™ | SkyScreen™                    | Circular camera cage |
| SkyRak®       | SkyTel™      | Material handling attachments | Wendy lighting frame |

\*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.