

S65XC | Boom Lift

Working height	21.81m
Horizontal outreach	16.51m
Closed length	9.76m
Closed height	2.82m
Closed width	2.49m
Platform size	1.83m x 0.76m
Rotation	Continuous
Max SWL	300/454kg
Weight	11412kg


Alternative machines

HT23RTJ
660SJHCS

Manufacturer

Genie

Working envelope

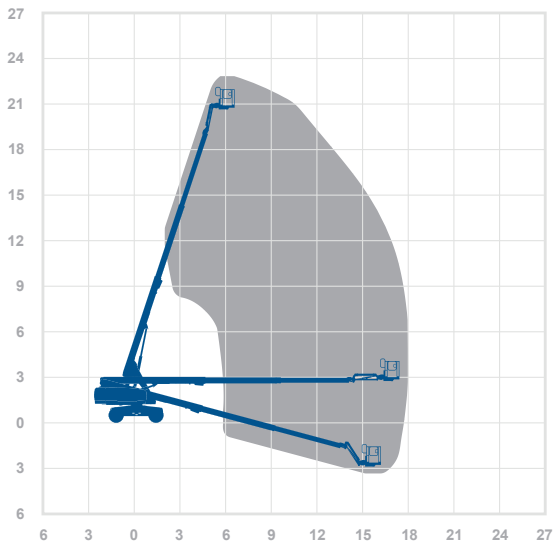

21.81m 16.51m

Standard features



Optional extras



0345 745 0000

nationwideplatforms.co.uk

**Nationwide
Platforms**
A **LOXAM** Company

Understanding this Product Specification Sheet

This product specification sheet is designed to help you better understand the capabilities and key features of the piece of equipment and whether it will meet your requirements.

The working envelope with height/reach indicator provides a quick visual reference to assist your equipment selection.

If you are unsure about any aspect of this piece of equipment, or would like more information to assist with your selection, please call our expertly trained staff on **0345 745 0000**

Height and outreach

Working height Horizontal outreach

AMWP11.5-8100
Boom Lift

Working height	11.2m	Alternative machines Star 10 Star 10A Manufacturer Dingt
Horizontal outreach	3m	
Closed length	2.55m	
Closed height	1.90m	
Closed width	1m	
Rotation	345°	
Platform height	0.2m	
Max SWL	200kg	
Weight	2000kg	
Deck size	0.62m x 0.870m	

Working envelope

0 2 4 6 8 10 12 14 16
0 2 4 6 8 10 12 14

Standard features

Optional extras

0345 745 0000
nationwideplatforms.co.uk
Nationwide Platforms
A BBA Group Company

Standard features

- | | | | |
|--|--|---|--|
| <ul style="list-style-type: none"> Battery power Diesel power Lithium battery Hybrid power Dual fuel option Gas power option Rough terrain (2 wheel drive) Rough terrain (4 wheel drive) | <ul style="list-style-type: none"> IPAF licence type IPAF licence type IPAF licence type IPAF licence type IPAF licence type Tracked Mast boom Articulating boom | <ul style="list-style-type: none"> Straight telescopic boom Non-marking tyres Outrigger legs Maximum people in cage* Push around vehicles Operator powered Indoor use only Indoor/Outdoor | <ul style="list-style-type: none"> Self drive J1B rotation IPAF driving licence type Power to platform Generator |
|--|--|---|--|

Optional extras

- | | | | |
|---|---|--|---|
| <ul style="list-style-type: none"> SkySiren® SkySiren® PCS SkySentry® SkyRak® | <ul style="list-style-type: none"> SkyRakPlus® SkyRakBoom® SkyRakMulti™ SkyTel™ | <ul style="list-style-type: none"> SkyRakEdge™ SkyShield™ SkyScreen™ Material handling attachments | <ul style="list-style-type: none"> Generator Camera pod Circular camera cage Wendy lighting frame |
|---|---|--|---|

*The number refers to indoor or outdoor uses. Call us for details.

Please note that all technical information referred to in this document is intended for guidance purposes only and does not act as a replacement for the manufacturer's specification or equipment user guides which should be referred to prior to placing your order. No responsibility can be accepted in the event that this document contains any errors, omissions or data that is different from that in the manufacturer's specification or equipment user guides.